

**KITAKO-SHIMADA**  
**VT4-350**

**Machine specifications**

No. of spindle	4
Chuck size	12 inch
Max. turning Dia. X Length	φ375mm (14.7") X 200mm (7.8")
Max. distance between spindles	424.26mm (16.7")
Spindle nose	ASA A2-8
Spindle bore	φ60mm (2.36")
Spindle motor (Standard)	18.5/22kw (25/30HP) X2
Spindle motor (Option)	22/26kw (30/35HP) X2
Spindle R.P.M (A)	23-2300
Spindle R.P.M (B)	32-3200
Turret (standard)	6st.X2
Turret (option)	8st.X2
X-axis stroke	300mm (11.8")
Z-axis stroke	450mm (17.7")
Rapid feed rate	20m/min
Floor space	3025 (119") X2980 (117.3")
Weight	12000kg (26620 lb)

**Standard Accessories**

- Hydra.unit
- Coolant device
- Total splash guard
- Production counter
- Chip conveyor
- Work light
- Door Interlock
- Alarm message (CRT)
- Hand tool kit

**Special Accesories**

- Spindle orientation device
- Spindle speed 2 steps auto change
- Power chuck
- Chuck pressure high-low change
- High-pressure coolant
- Robot
- Gantry loader
- In / Out conveyor
- Measurement unit
- others

**CNC Specifications**

Model	Fanuc 0i-TD
Simultaneous controlled axes	2axesX2
Command increment	0.001mm
Override	0-100%
Sequence	Fanuc
Part program strage size	512kbyte
Number of registerable programs	800
Tool offset pairs	200
Between spindle Compensation function	Spindle offset
Multi-language display	English·Chinese·French·German·Italian·Russian·Spanish·Portuguese·Swedish·Turkish·Korean·Japanese etc.

**CNC Other Standard Functions**

- Inch/Metric conversion
- Graphic display
- Dry run
- Single block
- Machine lock
- Direct drawing dimension programming
- Tool geometry / wear compensation
- Tool nose radius compensation
- Variable Lead thread cutting
- Custom macro
- Canned cycles
- Multiple repetitive cycle
- Optional chamfering / corner R
- Tool life management
- Spindle info. Screen display
- Alarm history display

※Product specifications, accessories, and machine appearance are subjected to change without notice.

Productive CNC 4 Spindle Vertical Lathe

**KITAKO-SHIMADA**

**VT4-350**



**SHIMADA MACHINERY CO.,LTD.**

**Head Office** 3-1-18 Sawakihama Mito-cho,Toyokawa,Aichi 441-0304  
TEL <0533> 76-3381 FAX <0533> 76-3386

**Yokohama Office** 540-16 Ichigao-cho,Aoba-ku,Yokohama,Kanagawa 225-0024  
TEL <045> 973-4800 FAX <045> 973-4805

**KITAKO-SHIMADA**

URL: <http://www.smd.co.jp>

<http://www.smd.co.jp>

Representante para Santa Catarina:

# METALSERT

Representações industriais

Fone: 47-4102-0471 | 47-98432-4446 | 47-98444-4279  
Email: [jonas.rodrigues@metalsert.com](mailto:jonas.rodrigues@metalsert.com) | [contato@metalsert.com](mailto:contato@metalsert.com)  
Blumenau-SC



Representante para Santa Catarina:



Fone: 47-4102-0471 | 47-98432-4446 | 47-98444-4279  
Email: [jonas.rodrigues@metalsert.com](mailto:jonas.rodrigues@metalsert.com) | [contato@metalsert.com](mailto:contato@metalsert.com)  
Blumenau-SC


# VT4-350

●Vertical Series  
**Productive CNC 4 Spindle Lathe**

**“Zero down time for loading / unloading.”**

**The latest solutions for productivity from SHIMADA-Japan's leading Multi-spindle specialist.**

- As a FM-cell, the machine facilitates automatization of a manufacturing line, and because of its vertical type, enables handling of heavy workpieces and a supply of auto-loading system.
- The loading spindle is protected against splashing coolant water and chips by a cover and provides connection with a robot or an auto-loader.
- An inventive spindle offset function compensates an error between each spindle in the microns.
- The spindle speed can be controlled independently for each spindle.
- The operational and mechanical alarm message reduce mental hardship of maintenance.
- The User Parameters of standard supply can reflect your concept toward operations.
- The machine offers many advantages of a vertical type including less floor space requirement for bigger working capability.

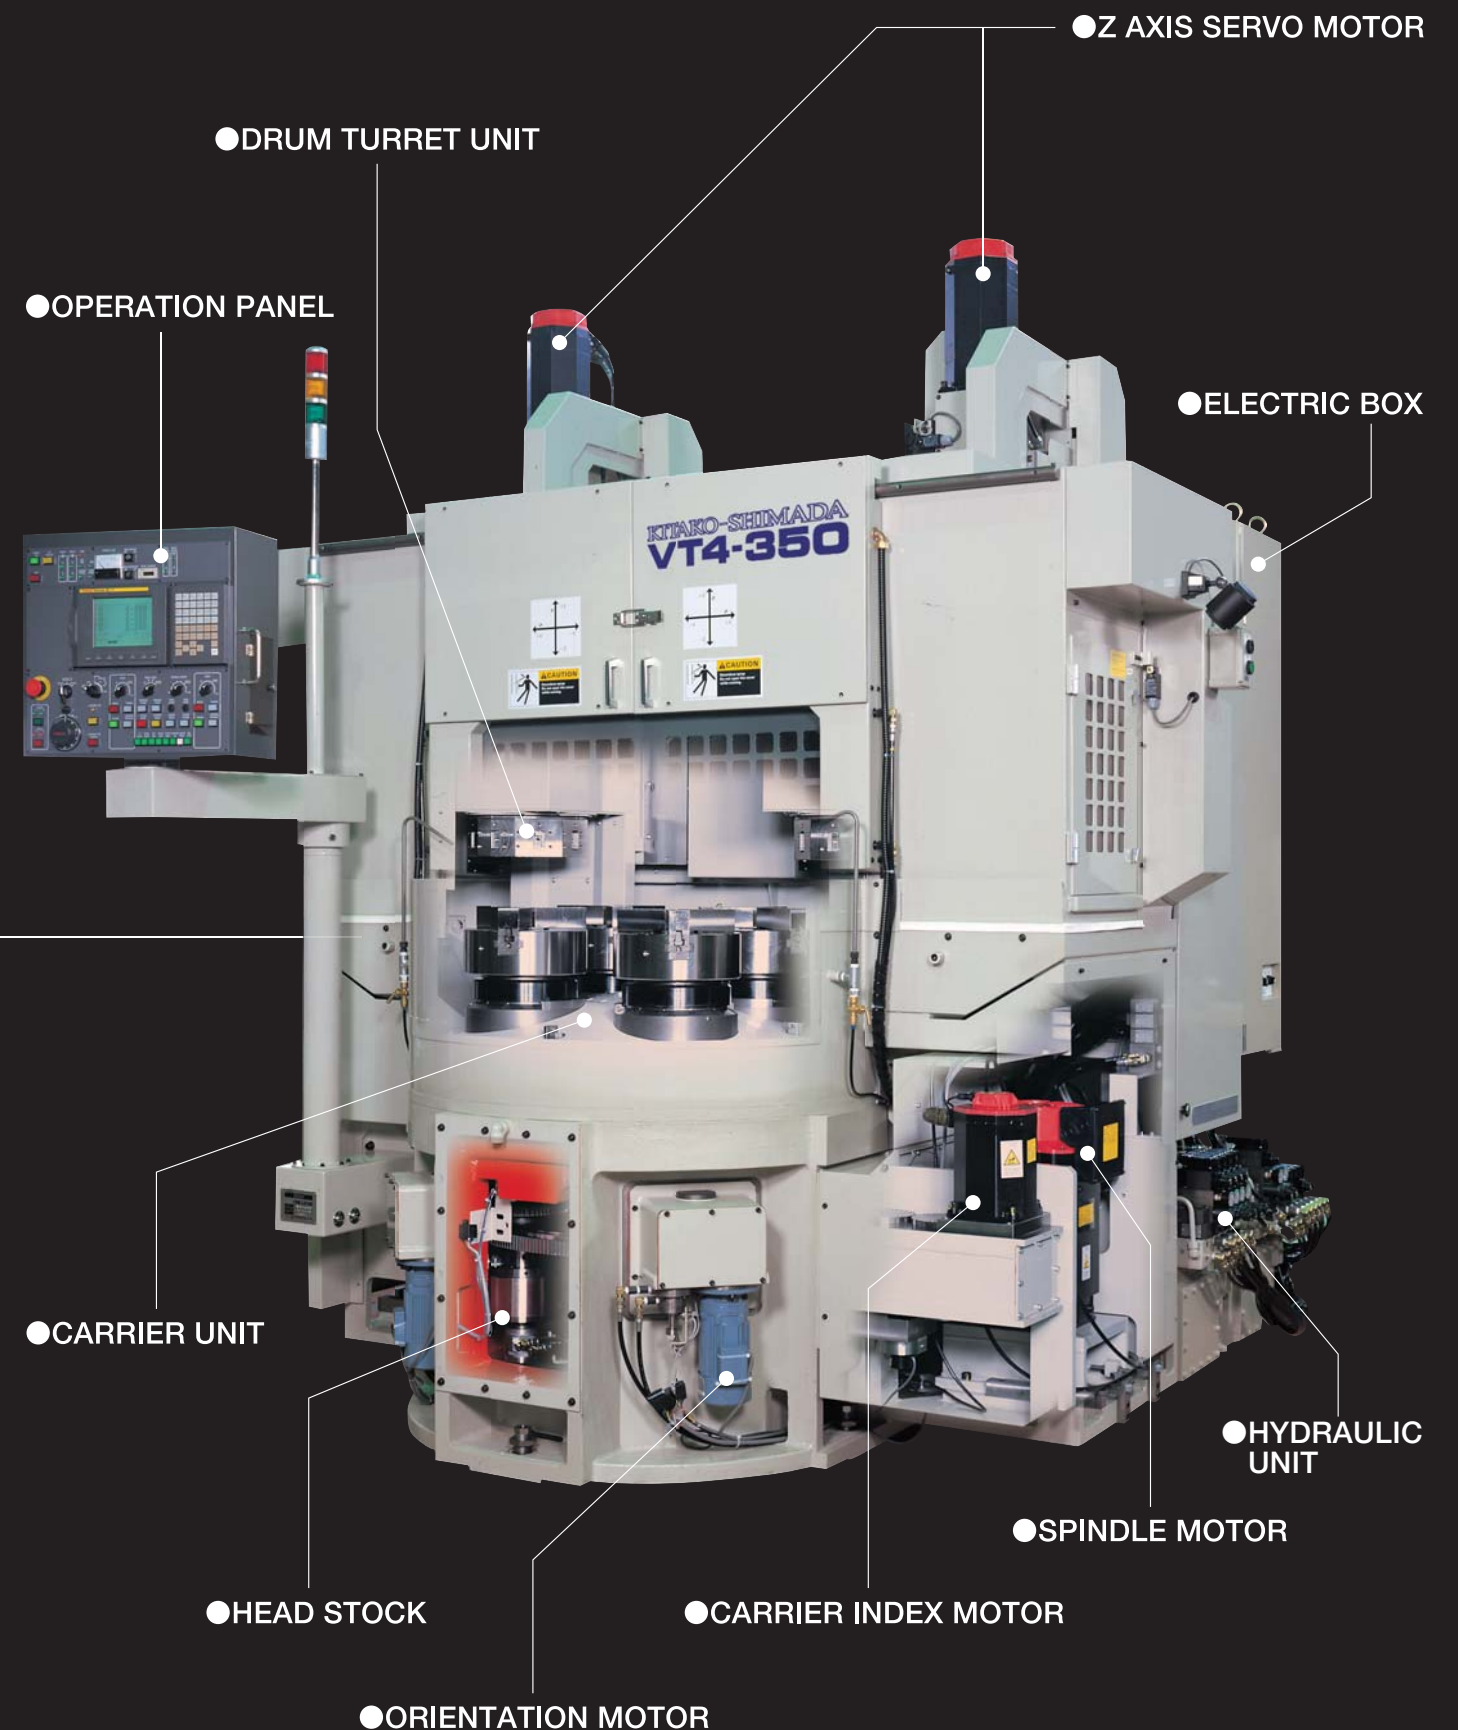


# Only 4 Spindle system can. Loading and Unloading is done while machining for high productivity.

## VT series (Vertical) ● Structure


### 4 Spindle Unit

The main spindles are hardened, Precision ground and supported by precision double row cylindrical roller bearings and angular contact bearings. The cartridge type spindles are lubricated with grease and sealed less maintenance.  
※Front : Loading/Unloading Area Back : Cutting Area

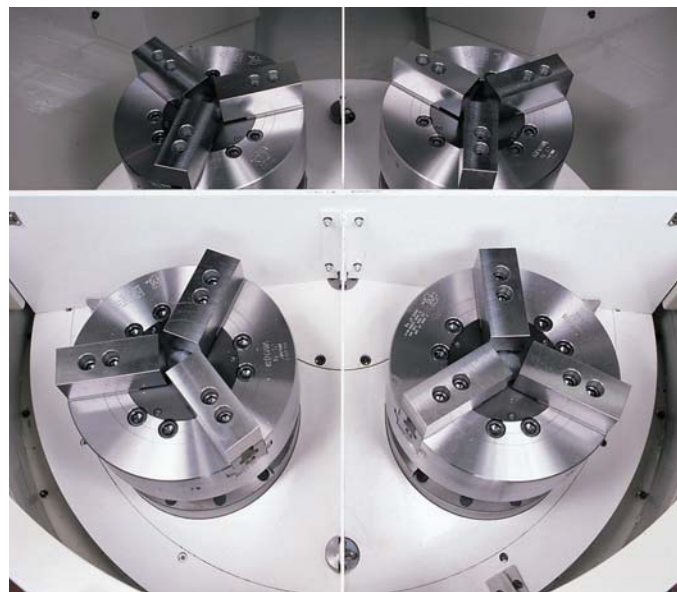

### High Accuracy Indexing

The spindles are mounted in a carrier drum, whose exterior is a large diameter curv coupling thus insuring high accuracy, rigidity and repeatability when positioning.

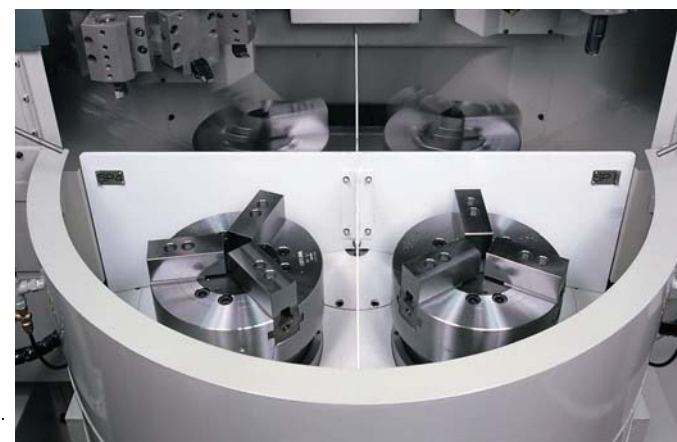

### Chip Conveyor

Hinge type chip conveyor is standard. Other type chip conveyor is available as an option.  
※Magnet Scraper, Rolling Drum Filter, etc.



### Hydraulic Unit

Hydraulic unit is mounted on the machine and pressure is monitored.



### Box Slideways

To ensure high accuracies and long life, each model is equipped with Box-Shaped slide ways. Mating surfaces are covered with special synthetic resin. The ball screws are forced lubricated. Telescoping steel covers protect the ways and screws from chips, coolant, and debris.




### 8 Station Drum Turrets

The 8 station drum turret is bi-directional random indexing.  
※The 8 station drum turrets are optional selects.


## MACINING METHODS

### AB/AB METHOD. Front and back side operation

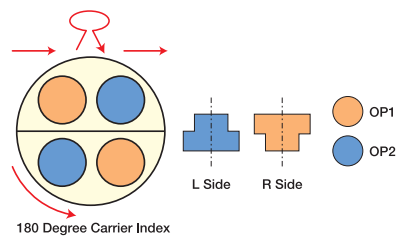


Front side by OP1, part reversed during load/unload sequence, Back side by OP2. OP1 and OP2 are independently machined at the same time. AB/AB method most effective when the OP1 and OP2 cutting times are close or identical.

### AA/AA METHOD. Twin single operation

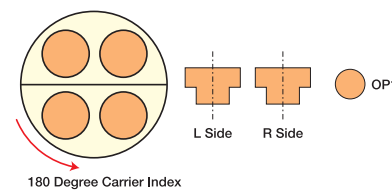

Two single operation parts are loaded/unloaded and machined simultaneously. AA/AA method is applied when only machining one side.

### AA/BB METHOD. Twin front and back side operation with two 180 degree carrier indexes.

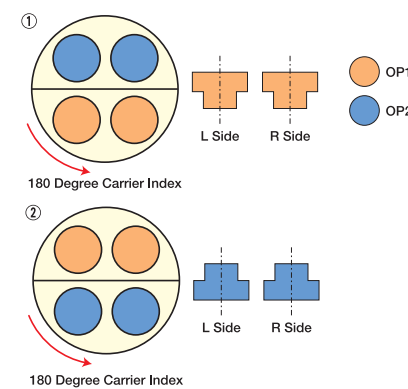

Two front sides machined simultaneously by OP1, both parts reversed during load/unload sequence, two back sides machined simultaneously by OP2. With this method two parts are completed every other carrier index. AA/BB method is effective if the OP1 and OP2 cutting times are unbalanced and sufficient tooling for both OPs can be mounted in each turret.


### Centralized operation panel

The centralized operation panel can be swung to the suitable position. The operability is outstanding by practically arranged CRT and operation switches.




### Preventive Maintenance Message

•Various user parameters of standard supply allow system setting for operation according to customers needs.  
•Alarm message are displayed CRT enabling self-diagnoses of machine and CNC device and tell about operational errors and faults for maintenance.

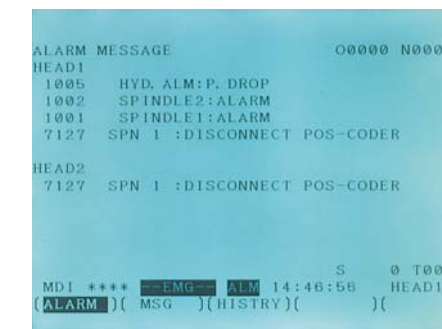


Machine alarm messages

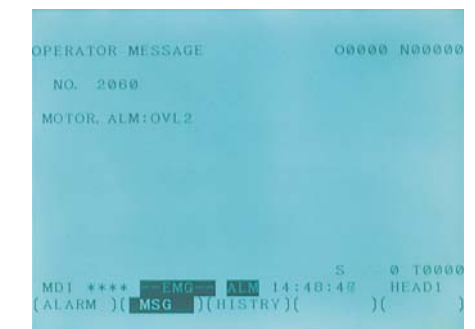

Operation error messages

### Floor space

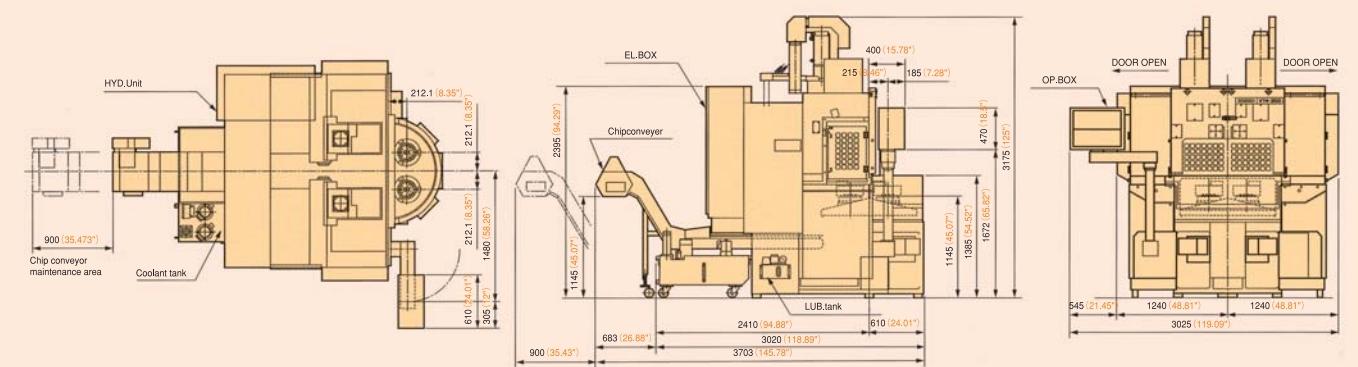

※Product specifications, accessories, and machine appearance are subjected to change without notice.


Representante para Santa Catarina:

**METALSERT**  
Representações industriais


Fone: 47-4102-0471 | 47-98432-4446 | 47-98444-4279  
Email: [jonas.rodrigues@metalsert.com](mailto:jonas.rodrigues@metalsert.com) | [contato@metalsert.com](mailto:contato@metalsert.com)  
Blumenau-SC



• **Tooling stroke** [Fone: +55 51 347-98432-4446] 47-98444-4279  
 Email: [jonas.rodrigues@metalsert.com](mailto:jonas.rodrigues@metalsert.com) | [contato@metalsert.com](mailto:contato@metalsert.com)  
 Blumenau-SC

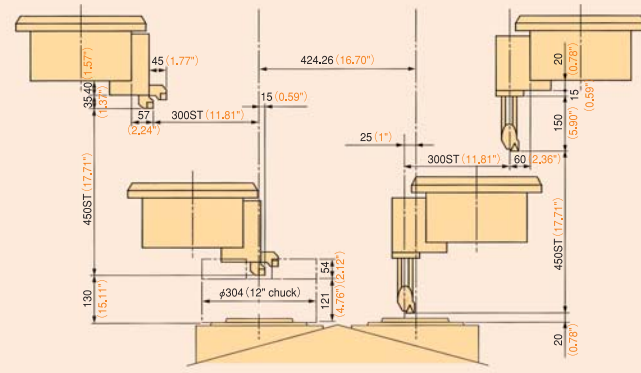

6 station drum turret

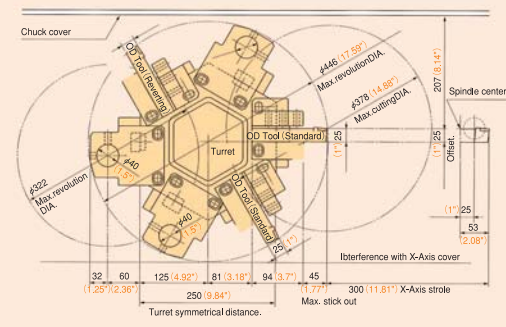

8 station drum turret (option)



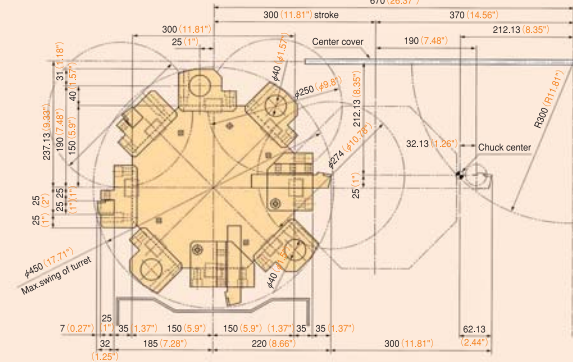


Figure of automation system

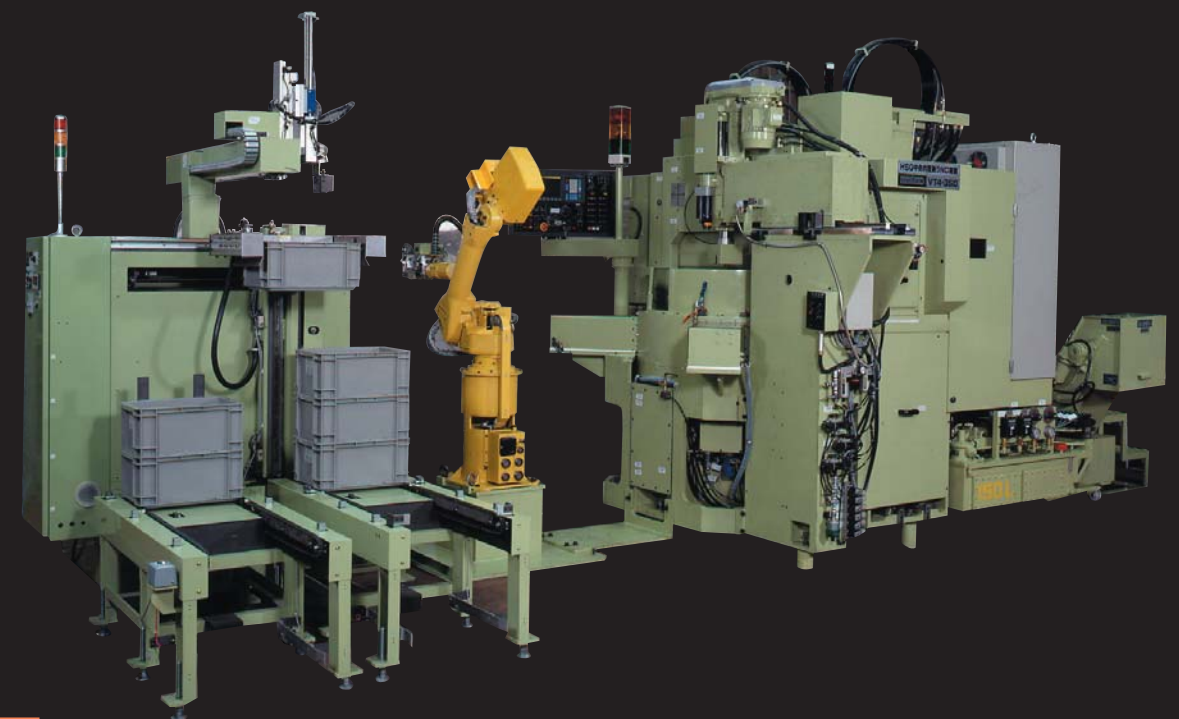


VT series


• **Tooling system**

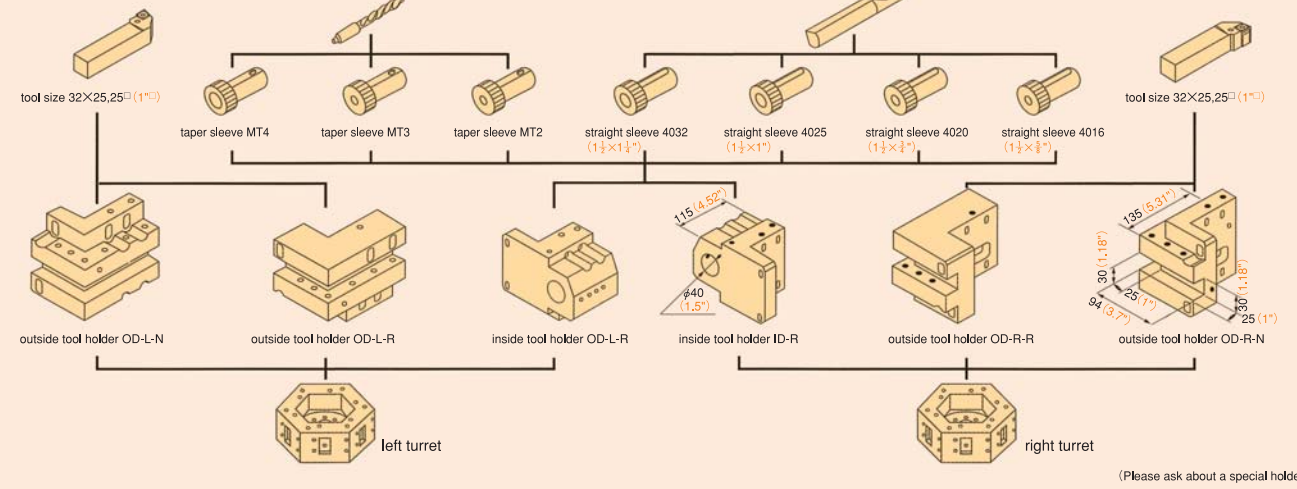


Spindle motor AC18.5/22kW (Cont./30min.)

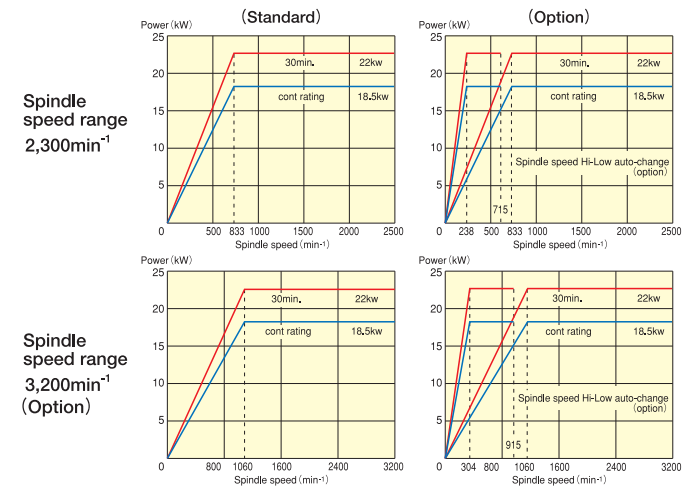

• **Main spindle & Bearing Construction**

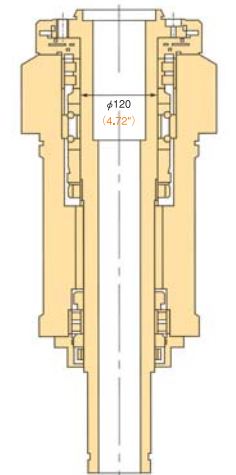

VT4-350 + Loader System

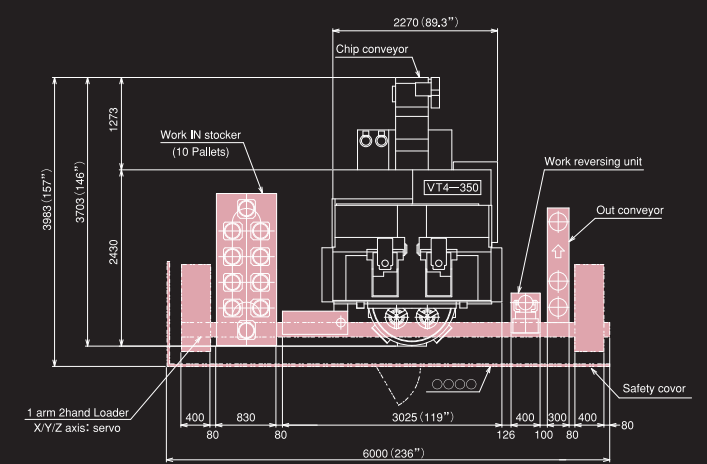

VT4-350 + Robot System

